

# Carton Closing Stapler CT-IC1819, 1823, 2223

The BeA CT-IC series pneumatic roll carton stapler, with its cycle through trigger valving and 1,000 staple loading capacity, is ideal for high speed, high volume box closing applications. Separate adjustments for staple leg length, depth of penetration and tightness of clinch facilitate everything from full through clinching to blind clinching of box flaps. At 5.22 lbs. this is the lightest portable roll carton stapler available. These tools incorporate an innovative magazine release lever to make clearing quick and easy should a jam occur.

## Popular Applications

Closing of corrugated boxes



## Technical Data

Model:	<b>CT-IC-1819</b> Standard	<b>CT-IC-1823</b> Standard
Part number:	12100286	12100287
Loading type:	top loading	top loading
Fastener type:	1 1/4" x 5/8' and 3/4" (RR)	1 1/4" x 5/8' and 3/4" (GR)
Magazine capacity:	1000	1000
Standard load, strips x fasteners/strip:	1 coil @ 1000	1 coil @ 1000
Working pressure:	70-90 P.S.I.	70-90 P.S.I.
Maximum air pressure:	100 P.S.I.	100 P.S.I.
Air consumption:	0.04 cu.ft./cycle @ 80 P.S.I.	0.04 cu.ft./cycle @ 80 P.S.I.
Recommended hose I.D.:	3/8"Ø	3/8"Ø
Weight:	5.22 lbs.	5.22 lbs.

Items supplied with tool: Operating instructions, spare parts list, service instructions.

**Also available** for GR Type Staple with 3/4" and 7/8" leg lengths.  
CT-IC-2223

Subject to technical modifications.




This tool conforms to the EC Directive for Machinery (89/392 EWG)

# Carton Closing St. CT-IC1819, 1823, 2223




BeA Fasteners U.S.A.  
2100-120 Fairfax Road  
Greensboro, NC 27407  
Phone: (336) 510-4232  
Fax: (336) 510-4233

## Fastener type GR and RR

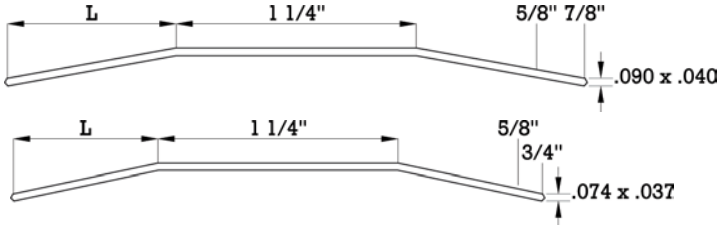

Part number	Description	L = Length
10002775	GR1 x 5/8	5/8"
10002776	GR1 x 3/4	3/4"
10002558	GR1 x 7/8	7/8"
10002773	RR1 x 5/8	5/8"
10002774	RR1 x 3/4	3/4"

Other lengths and finishes are also available on request.



The depth and tightness of clinch, can be adjusted infinitely.