



JET 1 TABBER

TAB & WAFER SEAL AFFIXER

Accomplish all of your tabbing, labeling, stamping or decal affixing requirements with the Secap[®] Jet 1 Tabber. Easy to set up and operate in-line or off-line with the highest productivity for today's mailing professionals. Automate the tedious manual task of affixing while complying with USPS automation regulations for tab placement and application.



PRINTERS



TABBERS



FOLDERS AND
INSERTERS



SOFTWARE

TECHNICAL SPECIFICATIONS

SPEED

Production Rate:

Single Tab: Up to 30,000 pieces/hr.
 Double Tab: Up to 24,000 pieces/hr.
 Triple Tab: Up to 18,000 pieces/hr.
(based on 8.5" length product)

Transport Belt:

0 to 600 ft./min. (for tabs <2" pitch)
 0 to 375 ft./min (for tabs >2" pitch)

Tabbing Head:

0 to 375 ft./min.

MEDIA

Size:

Minimum: 3" x 5"
 Maximum: 13.5" x 17"

Thickness:

Minimum: 20# single sheet
 Maximum: 5/8"

Stock: Coated, bond, recycled, card

TABS/LABELS

Types:

Tabs (single, double, triple), wafer seals, labels, stamps, repositional notes, customized stickers, scratch-offs, machine grade paper and adhesive, clear, translucent, unperfed, vertical perfed.

Note: Clear and translucent tabs require an "engineered backer" with registration marks for indexing.

Roll Size:

Up to 19.5" diameter mounted on a 3" core, up to 50,000 3/4" tabs, 40,000 1" tabs, 12,500 1-1/2" tabs or 9,000 2" tabs.

Backer:

.75" to 2" for standard head
 .75" to 4.5" for wide head

Label/Tab Length:

.75" to 7"

TAB PLACEMENT

Accuracy: +/- 1/8" repeatability

PHYSICAL CHARACTERISTICS:

Dimensions: 33"W x 37"D x 71"H
 Tabletop Height: 34.75" to 37.75"
 Weight: 350 lbs.
 Power: 115V, Single phase, 10 amp

CERTIFICATION


TUV, FCC

OPTIONS

Jet 1 Tabber is available in standard or wide head configuration.

Complies with USPS specifications for tab placement and application.

Specifications subject to change without notice. Speeds may vary depending on material and application.

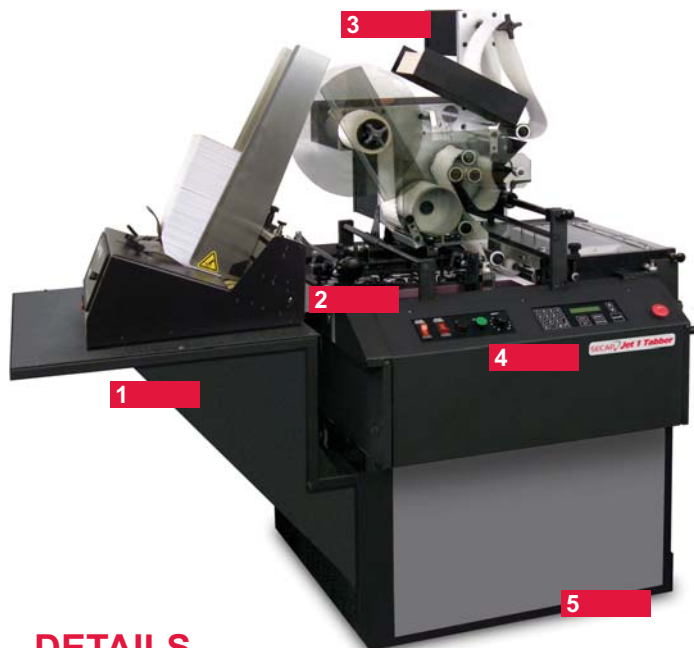

Above, Jet 1 Tabber shown in-line with mail transport including UltraFeed™ Feeder, Jet 1 Tabber, SIMS (Secap Ink Management System), Postnet Verifier, Printer Base, Dryer, Conveyor.

Left, Jet 1 Tabber shown in wide head configuration which accommodates 4" wide adhesive.

DETAILS

The Secap® Jet 1 Tabber applies wafer seals, postage and presort stamps, pressure sensitive labels, repositional notes/post-it notes, and foil seals to a wide variety of media including newsletters, double postcards, small catalogs, tri-fold brochures and self mailers. Eliminates the tedious task of manually affixing labels and tabs. Works in-line or off-line at production speeds up to 30,000 pieces/hr. The Secap® Jet 1 Tabber gets the job done fast and complies with the USPS regulations for tabbing open-ended mail to qualify for automation compatible discounts, while producing neat and professional looking pieces.

1. Compatible Unit Works In-Line or Off-Line

Works with a wide range of feeders, conveyors and inkjet print systems. Optional shelf with convenient working height supports table top feeder for stand alone operation.

2. High Production Tabbing with Precise Application

Transport deck and belts are designed for high production. Tab left side or right side; single, double, triple tabs. Production speeds with accurate, consistent placement.

3. Available in Standard or Wide Head Configuration

Tabber is shown above in wide head configuration which accommodates 4" wide adhesive media (required for repositional note application or large labels). *Standard head shown on front.*

4. Simple Controls and Easy to Use

Front panel controls are easy to use and make it simple to set up as well as switch between applications.

5. Durable and Reliable

Heavy duty construction for durability and improved product life. Adjustable and transportable base moves easily for in-line or off-line use.

GREAT FOR:

- Commercial Printers
- Pro Mailers
- Fulfillment Houses
- Anyone needing to seal open-ended media at production speeds

Ask about Secap's complete line of mailstream solutions:



PRINTERS



TABBERS




FOLDERS AND INSERTERS



SOFTWARE

Available from your authorized and certified Secap dealer.



SECAP
 Mailstream Management and Solutions...

10 Clipper Road
 West Conshohocken, PA
 19428-2721
 800.523.0320
 610.825.6205
 610.825.1397 (fax)
 www.secap.com

Contact the dealer above or call 800.523.0320 for a Secap dealer near you.